

WAUKESHA "C" SERIES CENTRIFUGAL PUMPS

CAPACITY CURVES


Based on water at 70°F. (22°C.)

MODEL: C-218

60 Hz 3500 RPM


SIZE: 2 x 1-1/2 x 8

CUBIC METERS PER HOUR

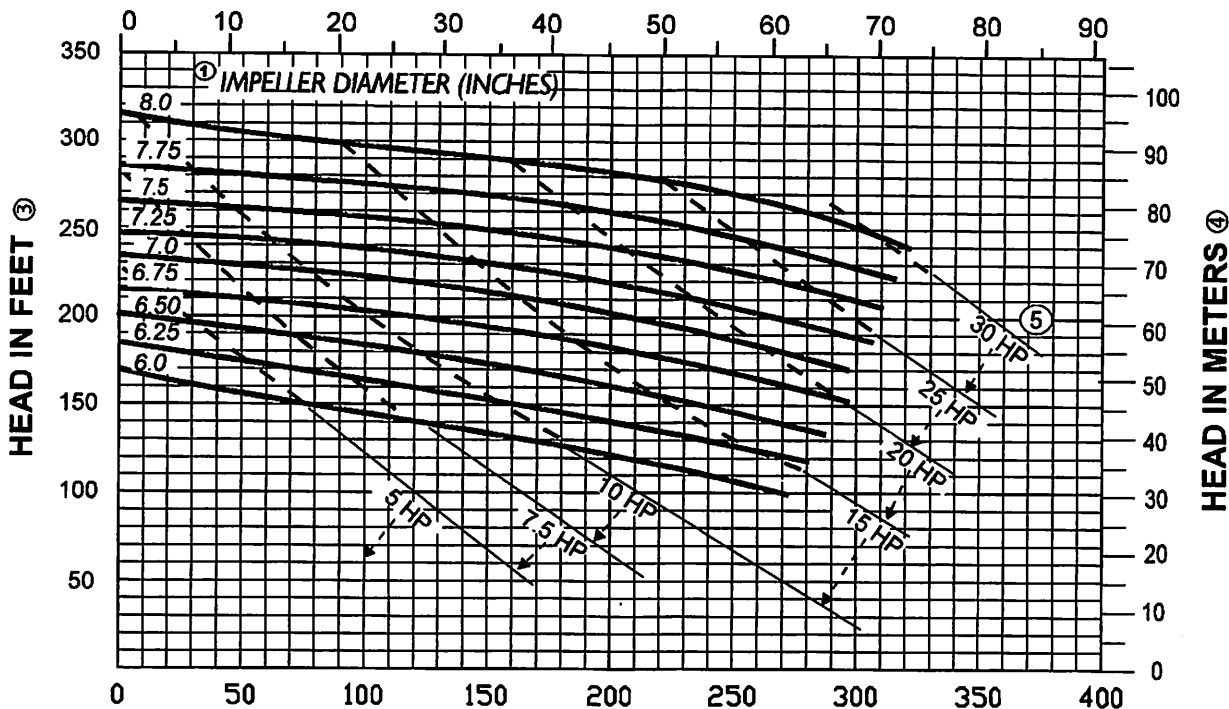

US GALLONS PER MINUTE

CUBIC METERS PER HOUR

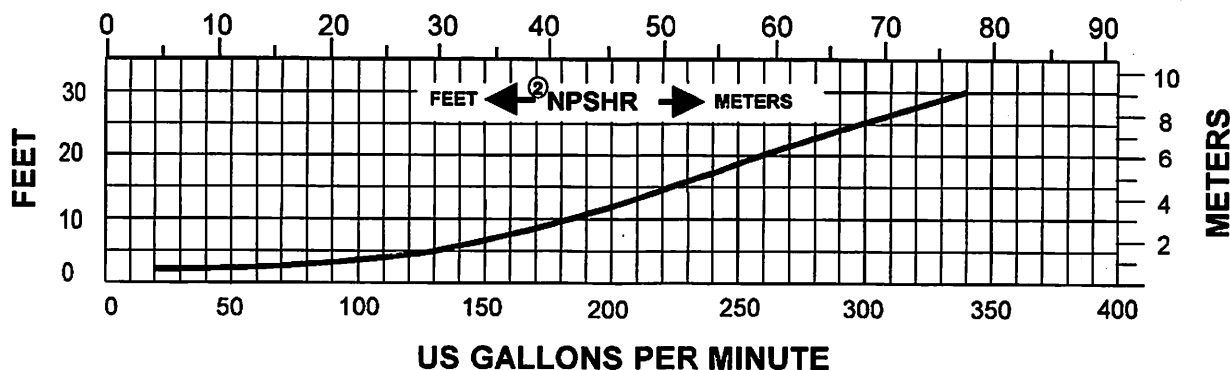

NOTES

- ① Impeller diameters available in 1/8-inch increments
- ② NPSHR is shown for maximum impeller diameter

COMMON CONVERSIONS

- ③ $\text{PSI} = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
- ④ $\text{Kg/cm}^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤ $\text{HP} \times 0.746 = \text{Kw}$